XFDM Data sheet


Features


- · Two accuracy ranks, $\pm 1.5\%$ FS and $\pm 2.5\%$ FS available
- · Volt level output
- · On-chip amplification and temperature compensations
- Pre-calibration of offset voltage and span
- Very small surface mountable package, Easy to mount on PCB

Applications

- · Industrial instrumentation
- · Pressure switch, Pneumatic device
- · Medical device

■Part number for ordering

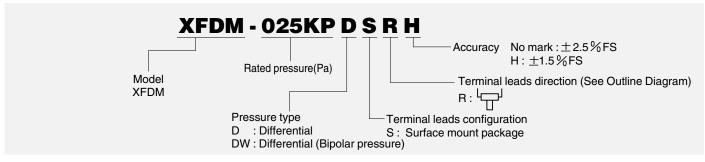

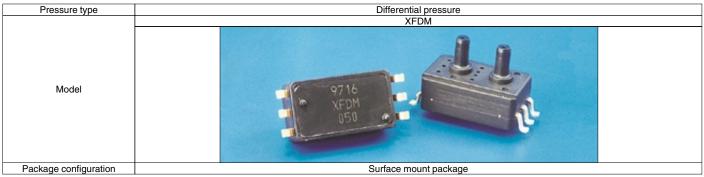

Measurable pressure range (kPa)	Part number for ordering				
− 100~100	XFDM-100KPDWSR	XFDM-100KPDWSRH			
0~25	XFDM-025KPDSR	XFDM-025KPDSRH			
0~50	XFDM-050KPDSR	XFDM-050KPDSRH			
0~100	XFDM-100KPDSR	XFDM-100KPDSRH			
0~200	XFDM-200KPDSR	XFDM-200KPDSRH			
0~1000	XFDM-001MPDSR	XFDM-001MPDSRH			

Specifications


Model/Rated pressure	100KPDW(H)	025KPD(H)	050KPD(H)	100KPD(H)	200KPD(H)	001MPD(H)	Unit	
Recommended operating co	nditions							
Pressure type	Differential pressure						_	
Rated pressure	±100	25	50	100	200	1000	kPa	
	±1.020	0.255	0.510	1.020	2.040	10.20	kg/cm²	
Measurable pressure range	-1 00~100	0~25	0~50	0~100	0~200	0~1000	kPa	
Pressure media	Non-corrosive gas only							
Excitation voltage	5.0±0.25							
Absolute maximum rating						<u>.</u>		
Maximum load pressure	Twice of rated pressure 1.5times of rated pressure						_	
Maximum excitation voltage	8						VDC	
Operating temperature	− 40 <i>∼</i> 125						°C	
Storage temperature	− 40∼125							
Operating humidity	30∼80 (No dew condensation)							
Electric performances/characteristics (Excitation voltage Vcc=5.0V constant, Ambient temperature Ta=25°C)								
Current consumption	less than 10							
Output impedance	less than 10							
Source current	less than 0.2						mA	
Sink current	less than 2						mA	
Mechanical response time	2 (For the reference)						msec	
Full scale span voltage	4.5							
Offset voltage %1, 2	0.2±0.1125, 0.2±0.0675(H)							
Full scale span voltage %1, 2	4.7±0.1125, 4.7±0.0675(H)							
Accuracy ※2	±2.5, ±1.5(H)						%FS/0~85℃	

Note; %1) Output refers to pressure at pressure port 2.


※2) Excluding input voltage error.



Outline dimensions

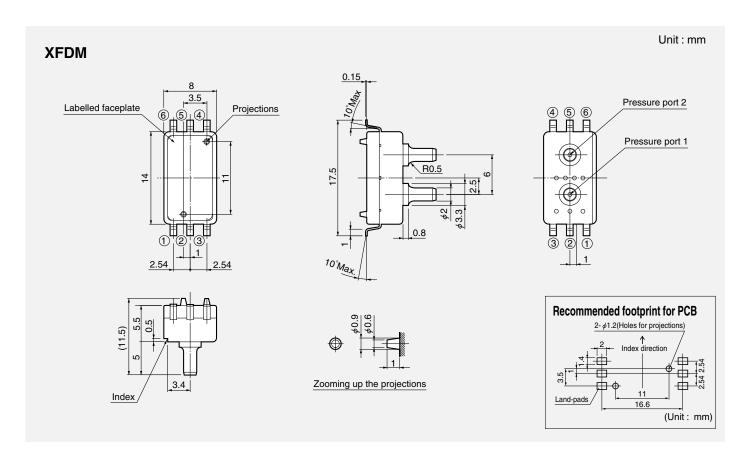

■ Connection diagram

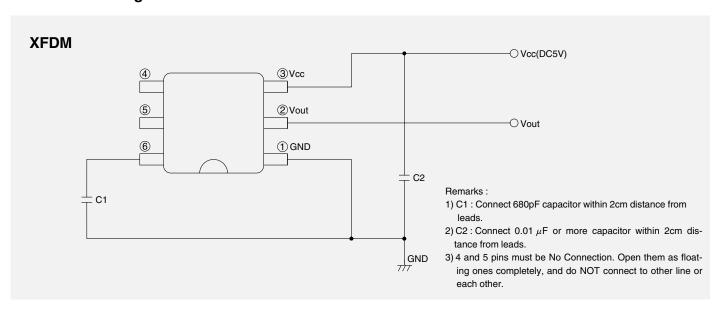

Note; Please read instruction "Notes" before using the sensor.

Fujikura reserves the right to change specifications without notice.

Fujikura Ltd.

If you have any questions regarding technical issues or specifications, please contact us. Sensor Engineering Department 5-1 Kiba 1-chome, Koto-ku, Tokyo 135-8512, Japan Phone +81-(0)3-5606-1072 Fax. +81-(0)3-5606-1538

E-mail: sensor@fujikura.co.jp