

FEATURES

- Miniature type, general purpose applications
- 1 to 2 poles contact form
- 15A contact capacity
- DC and AC coil available
- Various mounting options include socket, PCB and flange
- UL, CUR approved

TYPICAL APPLICATIONS

- Machine tools
- Medical equipment
- Industrial control
- Transportation

CONTACT RATING

Form	1 Form C (1Z)	2 Form C (2Z)
Rated Load	15A, 220VAC/28VDC	10A, 220VAC/28VDC
Max. Switching Current	15A	10A
Max. Switching Voltage	250VAC/125VDC	
Max. Switching Power	3300VA/420W	2200VA/280W

UL/CUR RATING

Form	1 Form C (1Z)	2 Form C (2Z)
General Use		10A, 250VAC
Resistance	15A, 250VAC/30VDC 10A, 240VAC/30VDC	10A, 240VAC/30VDC
Inductive		1/3 HP, 240VAC/120VAC

CONTACT DATA

Material		AgCdO
Initial Contact Resistance		50 mΩ max. at 1A, 24VDC
Service Life	Mechanical	2 x 10 ⁷ ops.
	Electrical	10 ⁵ ops.

COIL DATA

Type	Coil Voltage Code	Nominal Voltage (VDC/VAC)	Resistance (Ω) ±10%		Must Operate Voltage max. (VDC/VAC)	Must Release Voltage min. (VDC/VAC)
				Power Consumption		
DC	005	5	27.5	0.9W	4.0	0.5
	006	6	40		4.8	0.6
	012	12	160		9.6	1.2
	024	24	650		19.2	2.4
	048	48	2600*		38.4	4.8
	110	110	11000*		88.0	11.0
AC	006A	6	11.5	1.2VA	4.8	1.8
	012A	12	46		9.6	3.6
	024A	24	184		19.2	7.2
	048A	48	735		38.4	14.4
	120A	120	4550*		96.0	36.0
	220A/240A	220/240	14400*		176.0	66.0


CHARACTERISTICS

Operate Time	25 ms.
Release Time	25 ms.
Insulation Resistance	1000 MΩ, at 500 VDC, 50%RH
Dielectric Strength	1500 Vrms, 1 min. between coil and contacts 1000 Vrms, 1 min. between open contacts
Shock Resistance	10 g, 11ms. functional; 100 g, destructive
Vibration Resistance	DA 1.5 mm, 10 - 55 Hz
Ambient Temperature	-55°C to 70°C
Weight	37 g, approx.


ORDERING DESIGNATION

Example:	HG4104L /	012	A -	2Z	6	D	C
Model							
Coil Voltage Code							
DC/AC							
Nil: DC Coil; A: AC Coil							
Contact Form							
1Z: 1 Form C							
2Z: 2 Form C							
Version							
Nil: Solder Lug; 4: PCB							
6: Top Flange; 6A: Bottom Flange; 6B: Lateral Flange							
Indicator							
Nil: Without LED; D: With LED							
Contact Material							
C: AgCdO; S: AgSnOInO							


REFERENCE CURVES

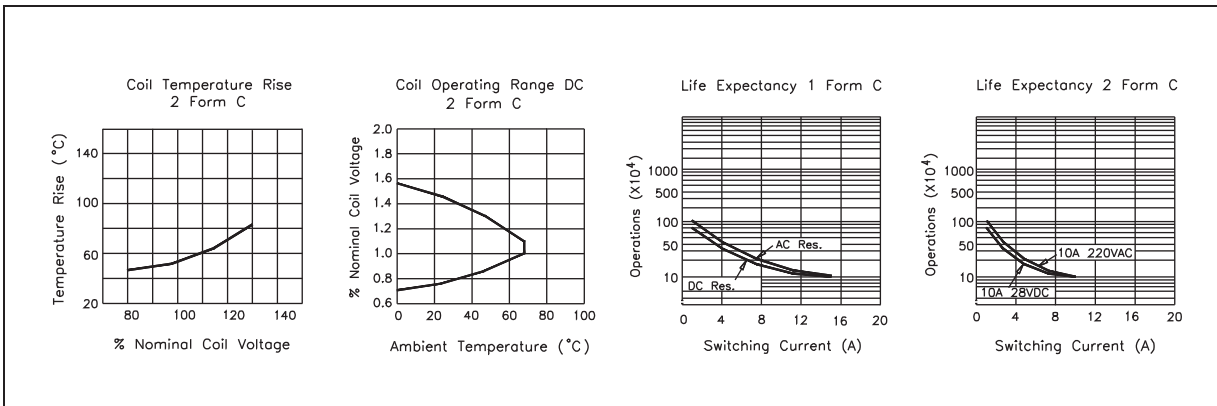


OVERALL DIMENSIONS, MOUNTING HOLES AND WIRING DIAGRAMS (mm)

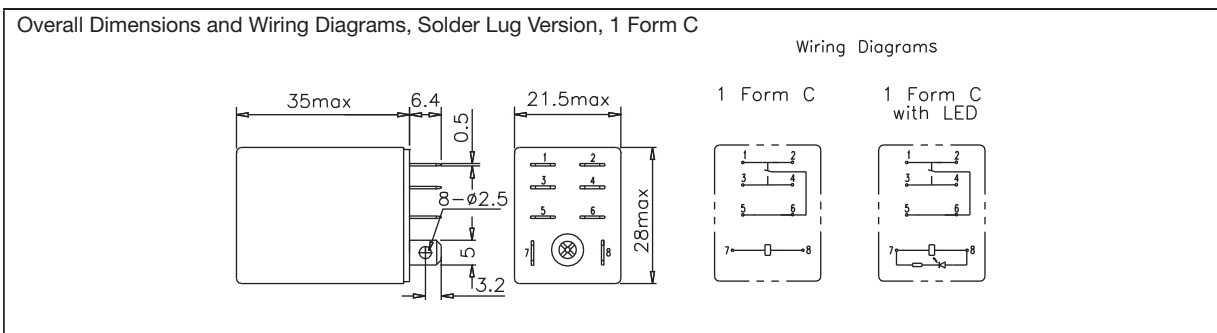


Overall Dimensions and Mounting Holes, Top Flange Version, 1 Form C

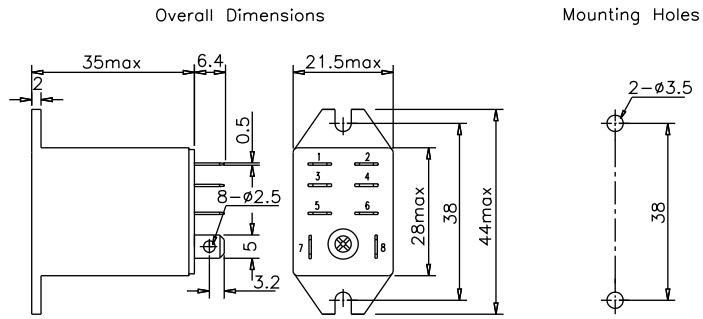


Overall Dimensions and Wiring Diagrams, Solder Lug Version, 2 Form C

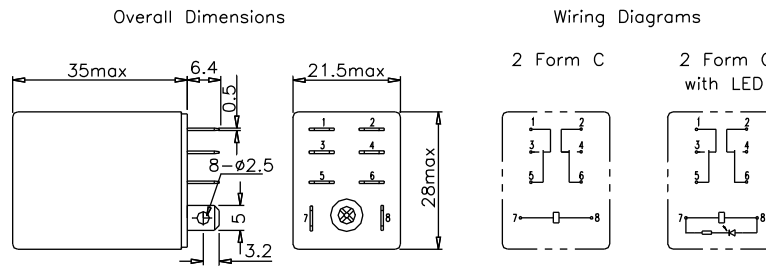


Overall Dimensions and Wiring Diagrams, PCB Terminal Version, 2 Form C

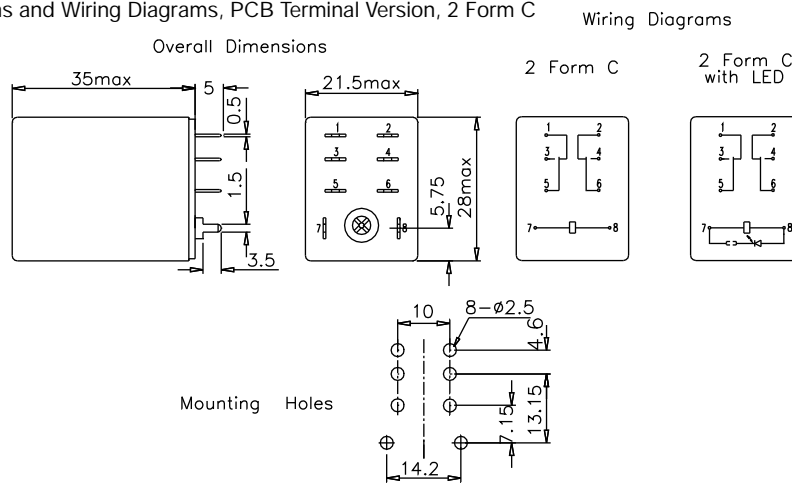


Overall Dimensions and Mounting Holes, Top Flange Version, 2 Form C

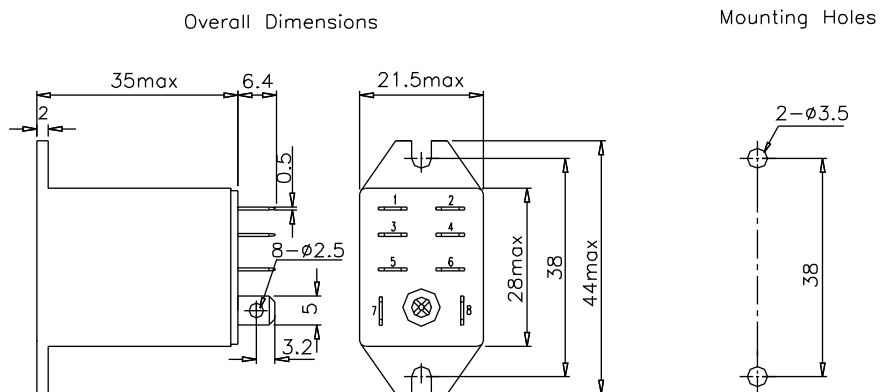

Overall Dimensions and Mounting Holes, Bottom Flange Version, 2 From C

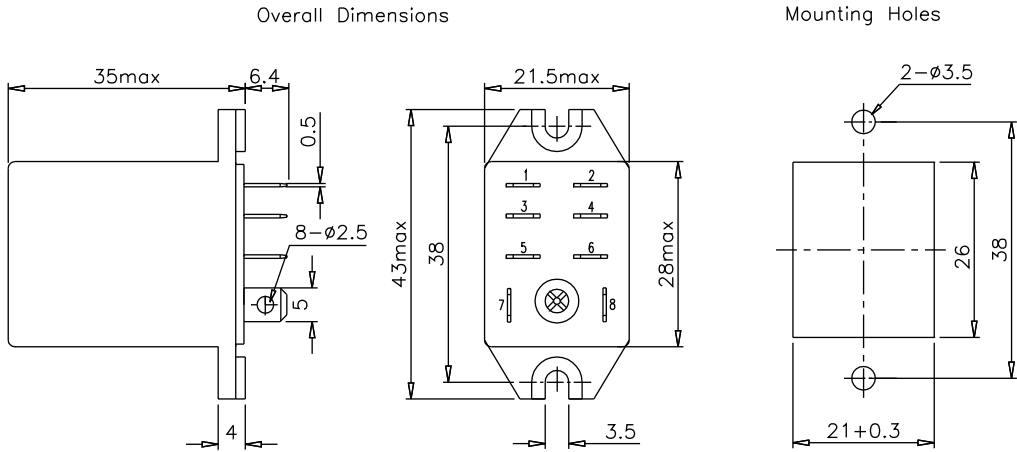

Overall Dimensions and Mounting Holes, Lateral Flange Version, 2 From C

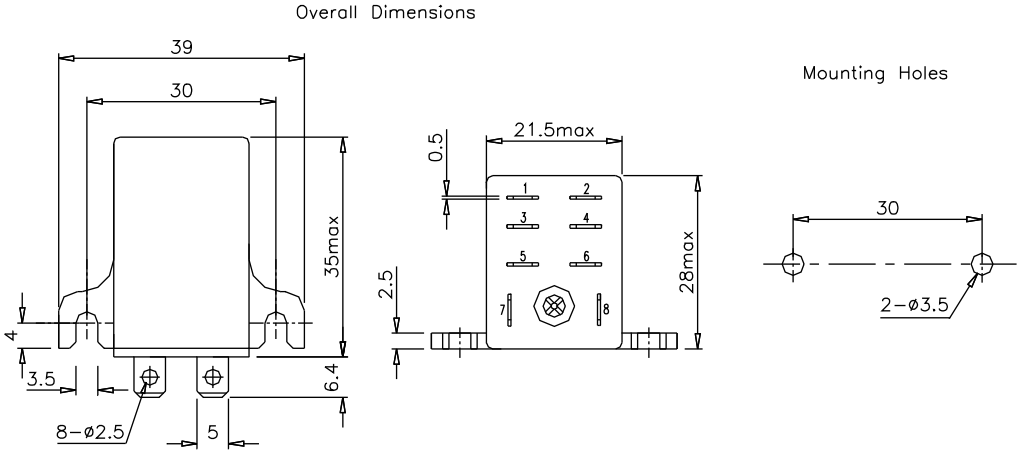

NOTES

1. All parameters, unless otherwise specified, are measured at ambient temperature 23°C.
2. Coil resistance with * mark is ±15%.
3. Custom-made services available with operational quantity. Please let us know your special requirements.
4. Specifications subject to change without prior notice.

Willow Technologies Limited
 Shawlands Court
 Newchapel Road
 Lingfield
 Surrey RH7 6BL
 England
 Tel: +44 (0) 1342 835234
 Fax: +44 (0) 1342 834306
 email: sales@willow.co.uk