

FEATURES

- 30A switching capacity
- PCB + QC termination
- Meets UL508 and UL873 spacing requirements

TYPICAL APPLICATIONS

- Power supply devices
- Industrial controls
- Home appliances
- Heating, refrigeration, ventilation

CONTACT RATING

Form		1 Form A (1H)	1 Form B (1D)	1 Form C (1Z)	
				NO	NC
Rated Load	240VAC	30A	15A	20A	10A
	28VDC	30A	10A	20A	10A
Max. Switching Current		30A	15A	20A	10A
Max. Switching Voltage		277VAC/30VDC			
Max. Continuous Current		30A	15A	20A	10A
Max. Switching Power		8.31KVA 900W	4.155KVA 450W	5.54KVA 600W	2.77KVA 300W
Min. Load		1A, 5VDC/12VAC			

UL /CSA RATING

Load Type	Voltage	1 Form A (1H)	1 Form B (1D)	1 Form C (1Z)	
				NO	NC
General Purpose	240VAC	30A	15A	20A	10A
Resistive	240VAC	30A	15A	20A	10A
	28VDC	20A	10A	20A	10A
Motor	240VAC	2HP	0.5HP	2HP	0.5HP
	120VAC	1HP	0.25HP	1HP	0.25HP
LRA/FLA	240VAC	80A /30A	30A /10A	50A /20A	20A /7A
	120VAC	98A /22A			
Tungsten	120VAC	TV5	TV3	TV5	TV3
Ballast	277VAC	10A	3A	10A	3A

CONTACT DATA

Material	AgSnOInO	
Initial Contact Resistance	50 m Ω, max. at 0.1A, 6VDC	
Service Life	Mechanical	10 <sup>7</sup> ops.
	Electrical	10 <sup>5</sup> ops.

COIL DATA

Type	Coil Voltage Code	Nominal Voltage (VDC/VAC)	Resistance (Ω) ±10%	Must Operate Voltage max. (VDC)	Must Release Voltage min. (VDC)
DC	005	5	27	3.75	0.5
	006	6	40	4.50	0.6
	009	9	97	6.75	0.9
	012	12	155	9.00	1.2
	024	24	660	18.00	2.4
	048	48	2560	36.00	4.8
	110	110	10330	82.50	11.0
AC	012A	12	26	10.20	1.8
	024A	24	106	20.40	3.6
	110A	110	2750	93.50	16.0
	220A	220	11000	187.00	33.0


CHARACTERISTICS

Operate Time	15 ms. typical
Release Time	10 ms. typical
Insulation Resistance	1000 M Ω, at 500VDC, 50%RH
Dielectric Strength	1500 Vrms, 1 min. between open contacts 2500 Vrms, 1 min. between coil and contacts
Shock Resistance	10 g, 11ms, functional; 100 g, destructive
Vibration Resistance	DA 1.5mm. 10 - 55 Hz
Power Consumption	DC: 0.9W, AC: 2VA, approx.
Ambient Temperature	-55 to 85°C operating, -40 to 130°C storage
Weight	Open: 28g, Covered: 33 g, approx.

## ORDERING DESIGNATION

Example:	HG4138 /	220	A -	1Z	0	1	W	S	F	- P
Model										
Coil Voltage Code										
DC/AC										
Nil: DC Coil A: AC Coil										
Contact Form										
1H: 1 Form A; 1D: 1 Form B; 1Z: 1 Form C										
Mounting Version										
0: PCB Mount; 1: Panel Mount										
Version										
Nil: Open; 1: Sealed; 2: Dust Cover										
Coil QC Size										
Nil: 2.8mm; W: 4.8mm										
Contact Material										
S: AgSnInO										
Thermal Class										
Nil: UL Class B; F: UL Class F										
P: RoHS Compliant ( Lead-free)										

## OVERALL DIMENSIONS, MOUNTING HOLES AND WIRING DIAGRAM (mm)

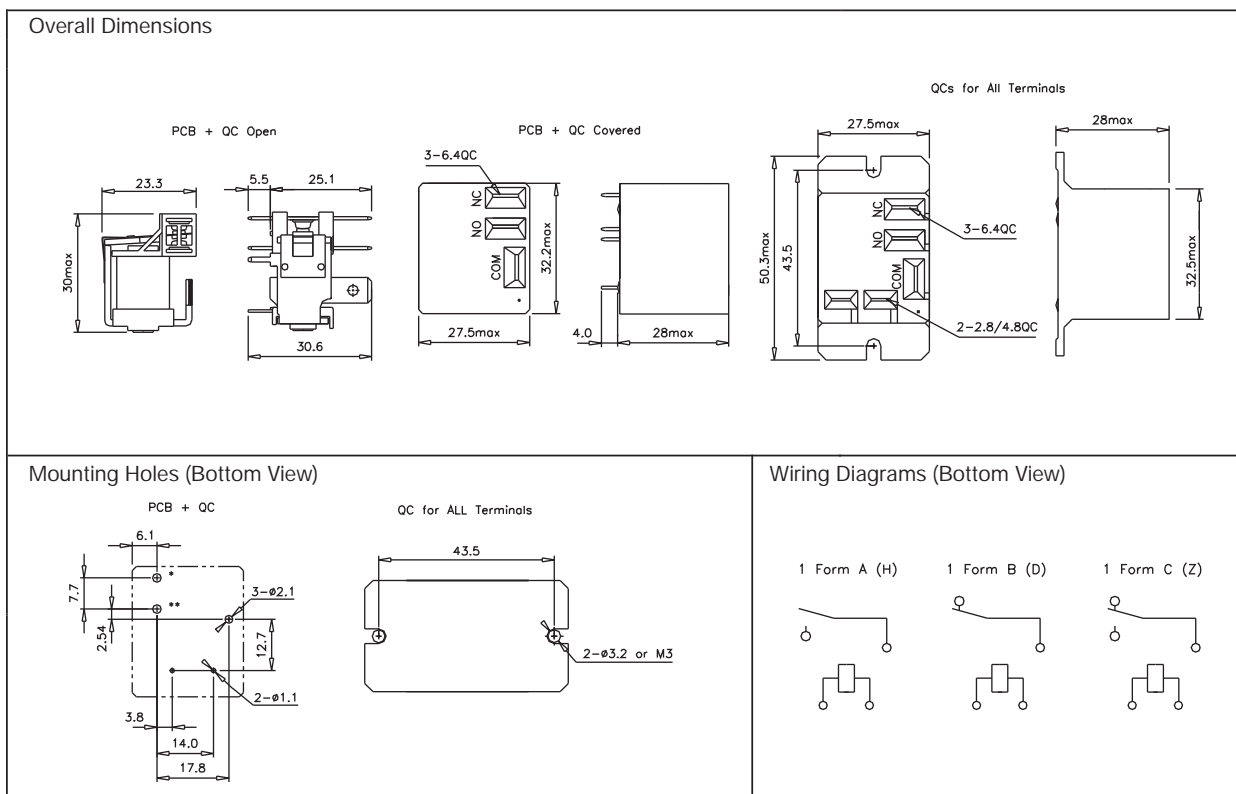

## NOTES

1. All parameters, unless otherwise specified, are measured at ambient temperature 23°C.
2. In mounting holes drawing, the \* hole is not needed for 1 Form A, the \*\* hole is not needed for 1 Form B.
3. For optimum electrical life, please remove the tape of sealed version after cleaning process.
4. Custom-made services available with operational quantity. Please let us know your special requirements.
5. Specifications subject to change without prior notice.

Willow Technologies Limited  
 Shawlands Court  
 Newchapel Road  
 Lingfield  
 Surrey RH7 6BL  
 England  
 Tel: +44 (0)1342 835234  
 Fax: +44 (0) 1342 834306  
 email: sales@willow.co.uk