


Subminiature PCB Power Relay

Automotive Subminiature PCB Power Relay

HG4231 HG4231A

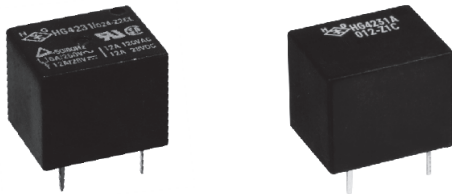

FEATURES

- Subminiature type, compact design
- Heavy duty, contact capacity up to 12A, 120VAC and 20A, 16VDC
- Low cost PCB relay

TYPICAL APPLICATIONS

- Office machine
- Home appliances
- Audio equipment
- Automotive control

CONTACT RATING

Type	HG4231	HG4231A
Resistive	12A, 120VAC 12A, 28VDC 7A, 240VAC	20A, 16VDC

UL/CSA/TUV/VDE RATING

Type	HG4231
Resistive	12A, 120VAC (UL/CSA) 12A, 28VDC (UL/CSA/TUV/VDE) 6A, 250VAC (TUV/VDE)
TV	5A, 120VAC(NO) (UL/CSA)

CONTACT DATA

Material	AgNi10, AgNi0.15, AgSnOInO	
Initial Contact Resistance	100 mΩ max. at 0.1A, 6VDC	
Service Life	Mechanical	10 ⁷ ops.
	Electrical	10 ⁵ ops.

COIL DATA

Type	Coil Voltage Code	Nominal Voltage (VDC)	Resistance (Ω) ± 10%		Must Operate Voltage max. (VDC)	Must Release Voltage min. (VDC)		
			Power Consumption					
			Standard	Sensitive				
HG4231	003	3	20	0.45W	0.36W	2.25	0.3	
	006	6	80			25	4.5	0.6
	009	9	180			100	6.75	0.9
	012	12	320			225	9.0	1.2
	024	24	1280			400	18.0	2.4
	048	48	4500			1600	36.0	4.8
HG4231A	006	6	45	0.8W		3.2	0.6	
	012	12	180			6.3	1.2	
	024	24	720			12.6	2.4	

CHARACTERISTICS


Operate Time	10 ms. typical
Release Time	5 ms. typical
Insulation Resistance	100 MΩ, at 500 VDC, 50%RH
Dielectric Strength	1000 Vrms, 1 min. between coil and contacts 1000 Vrms, 1 min. between open contacts
Shock Resistance	10 g, 11ms. functional; 100g, destructive
Vibration Resistance	DA 1.5mm, 10 - 55 Hz, functional
Power Consumption	HG4231: Standard 0.45W; Sensitive: 0.36W HG4231A: 0.8W
Ambient Temperature	HG4231: -40°C to 70°C; HG4231A: -40°C to 85°C
Weight	10 g, approx.

HG4231 HG4231A


ORDERING DESIGNATION

Example:	HG4231	A /	012-	Z	1	S	L	-P
Model								
Type	Nil: General Purpose A: Automotive							
Coil Voltage Code								
Contact Form	H: 1 Form A; D: 1 Form B; Z: 1 Form C							
Version	1: Sealed; 2: Flux Free; 3: Dust Cover							
Contact Material	Nil: AgNi10; A: AgNi0.15; S: AgSn0InO							
General Purpose Type Coil Sensitivity	Nil: Standard 0.45W; L: Sensitive 0.36W							
P: RoHS Compliant (Lead-free)								

REFERENCE CURVES

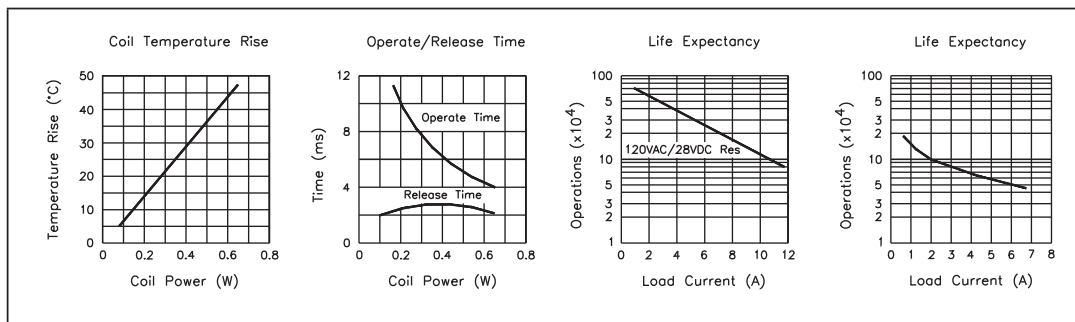

OVERALL DIMENSIONS, MOUNTING HOLES AND WIRING DIAGRAMS (mm)

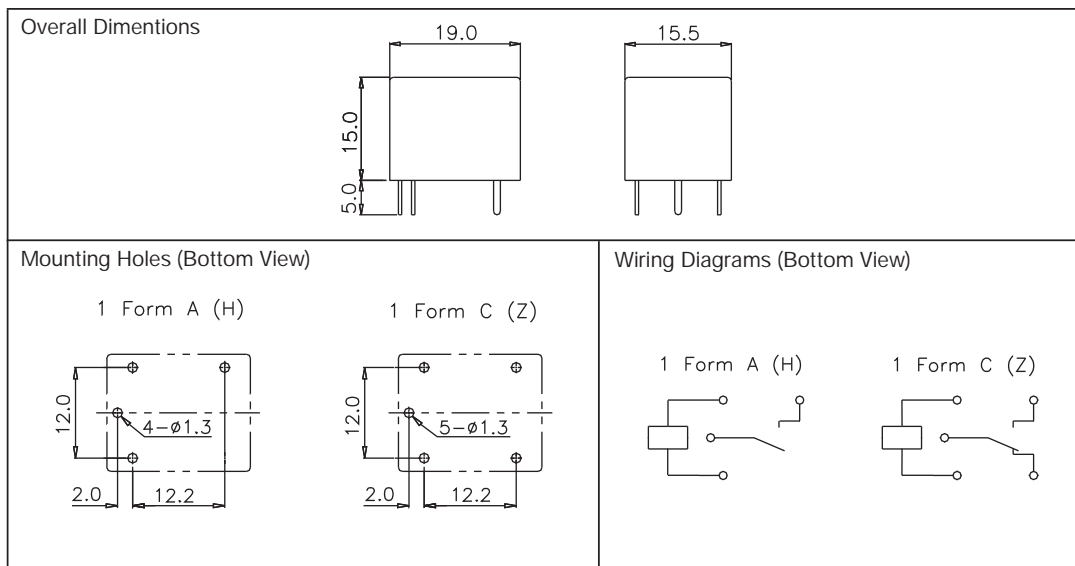

NOTES

1. All parameters, unless otherwise specified, are measured at ambient temperature 23°C.
2. Custom-made services available with operational quantity. Please let us know your special requirements.
3. Specifications subject to change without prior notice.

Willow Technologies Limited
 Shawlands Court
 Newchapel Road
 Lingfield
 Surrey RH7 6BL
 England
 Tell: +44 (0) 1342-835234
 Fax: +44 (0) 1342-834306
 email: sales@willow.co.uk