

FEATURES

- 30A continuous current capacity
- Rough construction suitable for automotive uses
- Available with open, dust cover and sealed version

TYPICAL AUTOMOTIVE APPLICATIONS

- Ventilation motor
- Inertia valve control
- Power window
- Rear window heating
- Intermittent wiper
- Safety belt warning system
- Alarm system

CONTACT DATA

Form		1 Form A (H)	1 Form B (D)	1 Form C (Z)
Max. Switching Current	Make	60A	45A	NO60A/NC30A
	Break	30A	20A	NO30A/NC15A
Material	AgNi0.15, AgCdO, AgSnOInO			
Initial Contact Resistance	100 mΩ max. at 0.1A, 6VDC			
Max. Switching Voltage	75VDC			
Max. Continuous Current		30A	20A	NO30A/NC15A
Min. Load	0.1A, 12VDC			
Service Life	Mechanical	10 ⁷ ops.		
	Electrical	2 x 10 ⁵ ops, see Note 4		

COIL DATA

Coil Voltage Code	Nominal Voltage (VDC)	Resistance (Ω) ±10%	Must Operate Voltage max. (VDC)	Allowable Voltage (VDC)	Must Release Voltage min. (VDC)
006	6	27	3.6	11.7	0.6
012	12	97	7.2	22.2	1.2
024	24	380	14.4	43.9	2.4

CHARACTERISTICS


Operate Time	9 ms. typical
Release Time	7 ms. typical
Insulation Resistance	100 MΩ, at 500 VDC, 50%RH
Dielectric Strength	500 Vrms, 1 min.
Shock Resistance	20 g, 11ms.
Vibration Resistance	10-40Hz: DA 1.27mm; 40-70Hz: 5 g; 70-100Hz: DA 0.5mm; 100-500Hz: 10 g.
Drop Resistance	1 M height drop on concrete (Covered types only)
Power Consumption	1.5 W, approx.
Ambient Temperature	-40°C to 125°C operating; -40°C to 155°C storage
Weight	Open: 20 g; Covered: 26 g, approx.

ORDERING DESIGNATION

Example:	HG4234A/	012	Z	1	C	A	F	B
Model								
Coil Voltage Code								
Contact Form								
H: 1 Form A; D: 1 Form B; Z: 1 Form C								
Version								
Nil: Open; 1: Sealed; 2: Dust Cover								
Contact Material								
Nil: AgNi10; A: AgNi0.15; C: AgCdO; S: AgSnOInO								
Mounting & Termination Code								
A: PCB B: PCB+QCs for Contacts C: QCs for All Terminals								
Thermal Class								
Nil: UL Class B; F: UL Class F								
QCs Terminal Options*								
Nil: Shrouded QCs; B: All QCs Exposed								

*Note: QCs Terminal Options are not applicable for PCB Mounting & Termination Code A

OVERALL DIMENSIONS, MOUNTING HOLES AND WIRING DIAGRAMS (mm)

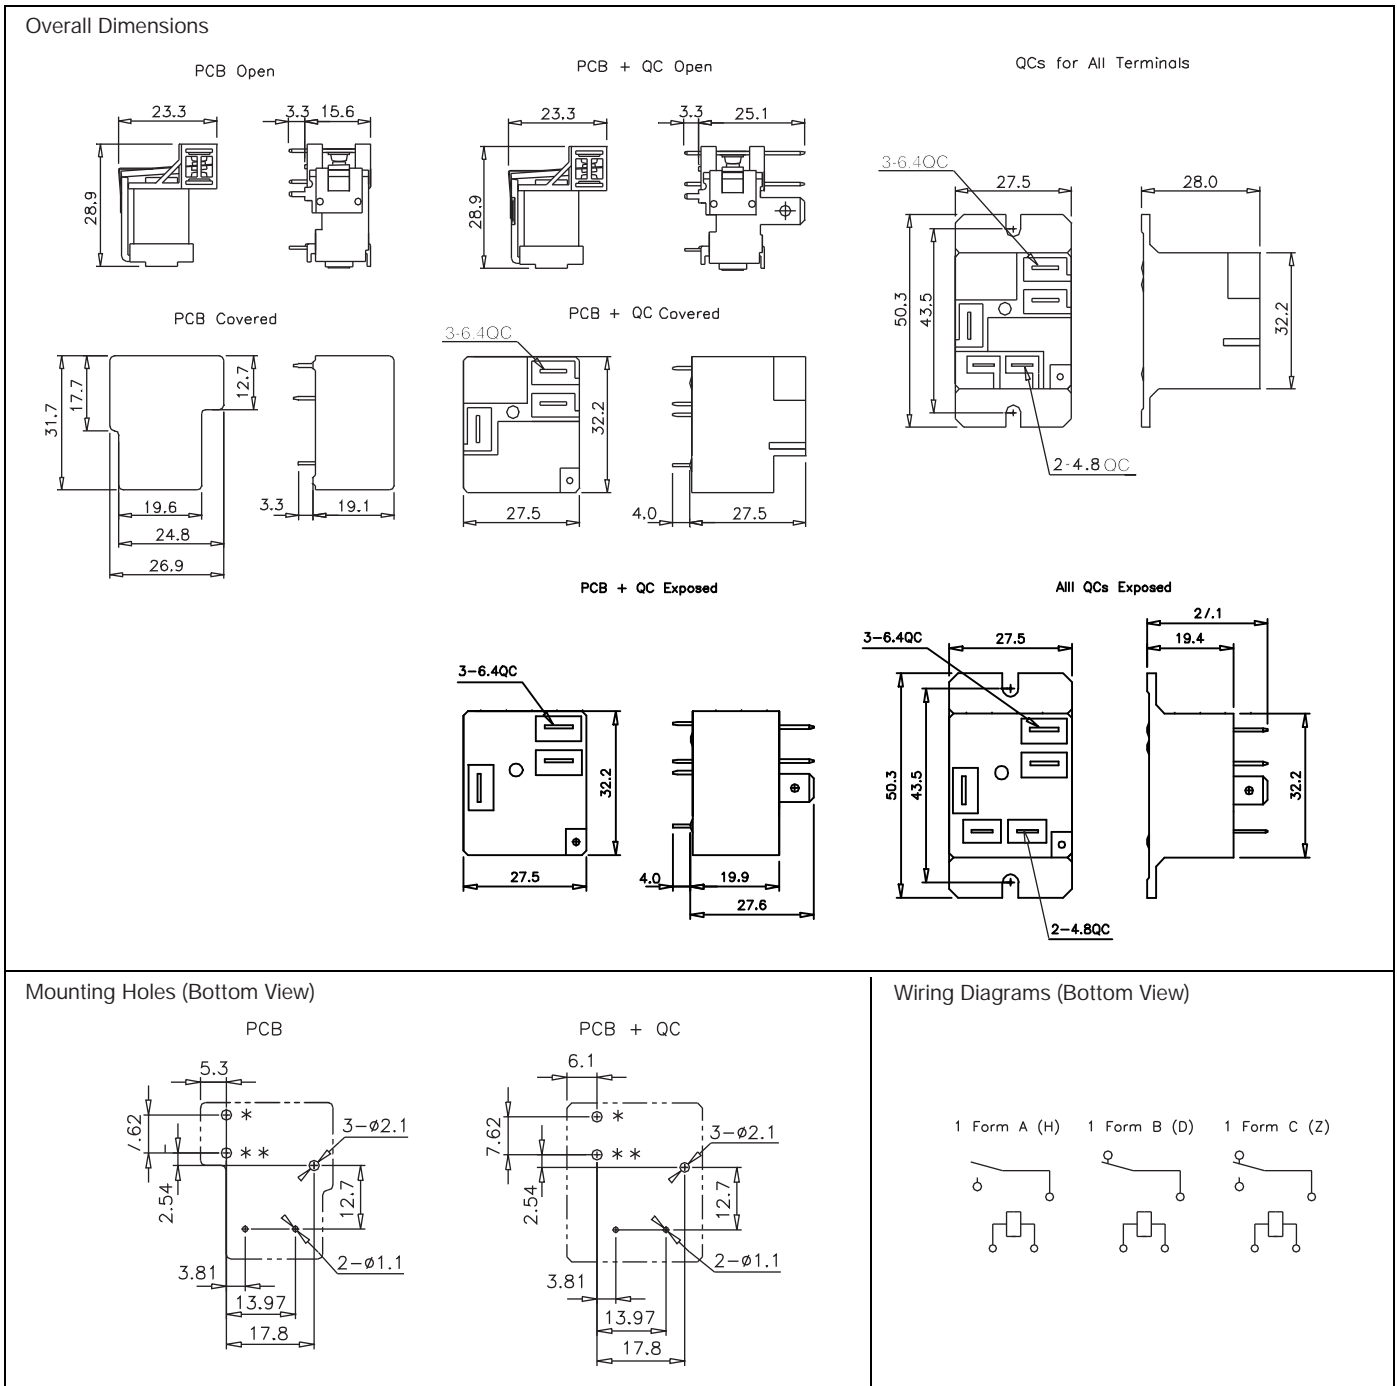

NOTES

1. All parameters, unless otherwise specified, are measured at ambient temperature 23°C.
2. In mounting holes drawing, the * hole is not needed for 1 Form A, the ** hole is not needed for 1 Form B.
3. To exert optimum electrical life, please remove the tape tab/knock-off of sealed version after cleaning process.
4. Custom-made services available with operational quantity. Please let us know your special requirements.
5. Specifications subject to change without prior notice.

Willow Technologies Limited
 Shawlands Court
 Newchapel Road
 Lingfield
 Surrey RH7 6BL
 England
 Tel: +44 (0)1342-835234
 Fax: +44 (0)1342-834306
 email: sales@willow.co.uk