

FEATURES

- Bridging-over contact configurations for heavy inductive load breaking
- 1 Form X and 2 Form X contact form
- Quick connect, PCB terminal, screw mounting for choice
- Industry Standard Style

TYPICAL APPLICATIONS

- Package air conditioners
- Heaters and refrigeration control
- UPS

CONTACT RATING

Form	1 Form X (1QH)	2 Form X (2QH)
Resistive	30A, 240VAC	2 x 25A, 240VAC

CONTACT DATA

Material	AgSnOInO	
Initial Contact Resistance	50 mΩ max. at 0.1A, 6VDC	
Service Life	Mechanical	5 x 10 ⁶ ops.
	Electrical	10 ⁵ ops.

UL/CSA RATING (PENDING)

Form	1 Form X (1QH)	2 Form X (2QH)
Resistive	30A, 277VAC	25A, 277VAC
TV	10A, 125VAC	10A, 125VAC
Motor	1.5HP, 125VAC	1HP, 125VAC
	3HP, 277VAC	2HP, 277VAC
	86LRA, 20FLA, 125VAC	69LRA, 16FLA, 125VAC
	60LRA, 14.1FLA, 277VAC	43LRA, 10FLA, 277VAC

COIL DATA

Type	Coil Voltage Code	Nominal Voltage (VDC/VAC)	Resistance (Ω) ±10%		Must Operate Voltage max. (VDC/VAC)	Must Release Voltage min. (VDC/VAC)
			Power Consumption			
DC	003	3	4.7	1.9W	2.25	0.3
	006	6	18.8		4.5	0.6
	012	12	75.0		9.0	1.2
	024	24	300.0		18.0	2.4
	048	48	1200.0		36.0	4.8
	100	100	5200.0		75.0	10.0
	110	110	6300.0		82.5	11.0
AC	220	220	21000.0	165.0	22.0	
	006	6	8.8	1.7 – 2.7VA	4.8	0.6
	012	12	35.0		9.6	1.2
	024	24	130.0		19.2	2.4
	048	48	480.0		38.4	4.8
	110	110	2150.0		88.0	11.0
	/120	/120			/96.0	/12.0
	220	220	8880.0		176.0	22.0
/240	/240		/192.0		/24.0	


CHARACTERISTICS

Operate Time	30 ms. max.
Release Time	30 ms. max.
Insulation Resistance	100 MΩ, at 500 VDC, 50%RH
Dielectric Strength	4000 Vrms, 1 min. between coil and contacts 2000 Vrms, 1 min. between open contacts 2000 Vrms, 1 min. between adjacent contacts
Shock Resistance	10 g, 11ms. functional; 100 g, destructive
Vibration Resistance	DA 1.5mm, 10 - 55 Hz
Ambient Temperature	-55°C to 70°C
Weight	90 g, approx.


ORDERING DESIGNATION

Example:	HG4505 /	220	A -	2QH	1	S	4	F	G	- P
Model										
Coil Voltage Code										
DC/AC										
Nil: DC Coil; A: AC Coil										
Contact Form										
1QH: 1 Form X; 2QH: 2 Form X										
Version										
1: Sealed; 2: Dust Cover										
Contact Material										
S: AgSnInO										
Mounting Version										
Nil: Quick Connect; 4: PCB Terminal										
Thermal										
Nil: Standard, UL Class B; F: UL Class F										
Contact Gap										
Nil: Standard; G: Big Gap										
P: RoHS Compliant (lead-free)										

REFERENCE CURVES

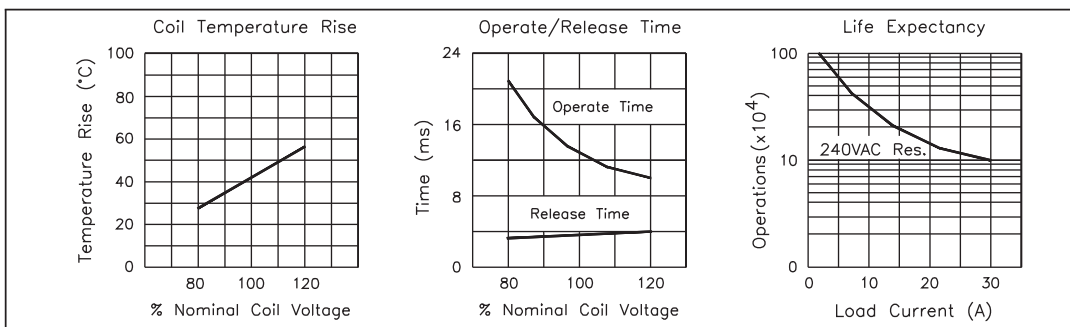

OVERALL DIMENSIONS, MOUNTING HOLES AND WIRING DIAGRAMS (mm)

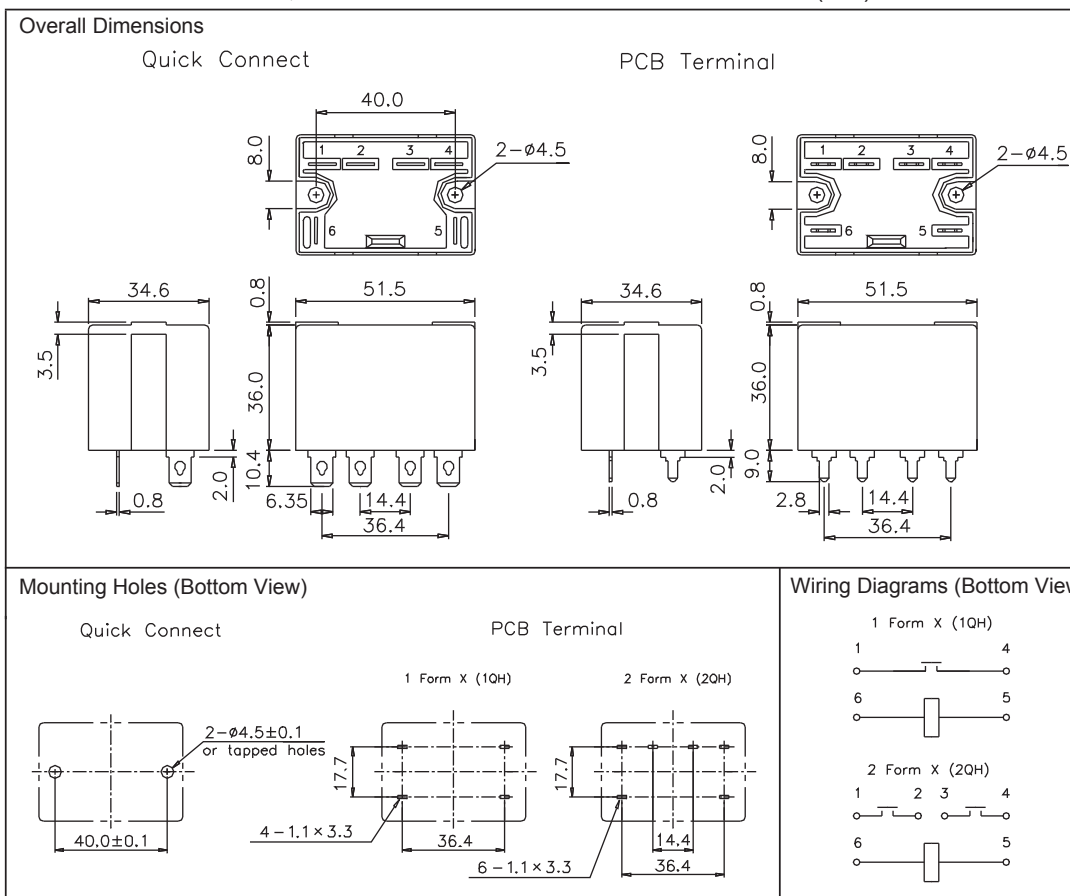

NOTES

- All parameters, unless otherwise specified, are measured at ambient temperature 23°C.
- Custom-made services available with operational quantity. Please let us know your special requirements.
- Specifications subject to change without prior notice.

Willow Technologies Limited

Shawlands Court
Newchapel Road
Lingfield
Surrey RH7 6BL
England

Tel: +44 (0) 1342-835234
Fax: +44 (0) 1342-834306
email: sales@willow.co.uk