

FEATURES

- Specially designed for compressor use
- Quick connects for quick hook-up
- Class B insulation material
- "Great Wall" mark approved
- Other approvals pending

TYPICAL APPLICATIONS

- Compressors in refrigerator, air conditioner, HVAC, etc.
- Similar applications where starter relay is used

CONTACT RATING

Form	1 Form B (D)
Make + Break	16A, 250VAC, $\cos \phi = 0.85$
Break Only	35A, 250VAC, $\cos \phi = 0.85$

CONTACT DATA

Material	AgCdO	
Initial Contact Resistance	50 mΩ max. at 0.1A, 6VDC	
Service Life	Mechanical	5 x 10 ⁵ ops.
	Electrical	3 x 10 ⁵ ops.

COIL DATA

Coil Voltage Code	Resistance (Ω) ±10%	Must Operate Voltage Range (VAC)	Must Release Voltage Range (VAC)	Power Consumption max.
3G	7500	180 - 195	40 - 105	5 VA
6N	15000	260 - 280	60 - 135	

CHARACTERISTICS


Operate Time	20 ms. max.
Release Time	20 ms. max.
Insulation Resistance	500 MΩ, at 500 VDC, 50%RH
Dielectric Strength	1200 Vrms, 1 min. between open contacts
Shock Resistance	10 g, 11ms. functional
Vibration Resistance	DA 1.5mm, 10 - 55 Hz
Ambient Temperature	-25°C to 85°C
Weight	100 g, approx.

ORDERING DESIGNATION


Example:	HG4506 /	3G -	D	2	C
Model					
Coil Voltage Code					
3G: 180 - 195 VAC					
6N: 260 - 280 VAC					
Contact Form					
D: 1 Form B					
Version					
1: Sealed; 2: Dust Cover					
Contact Material					
C: AgCdO; S: AgSnOInO					

OVERALL DIMENSIONS, MOUNTING DIMENSIONS AND WIRING DIAGRAM (mm)

Overall Dimensions and Mounting Dimensions

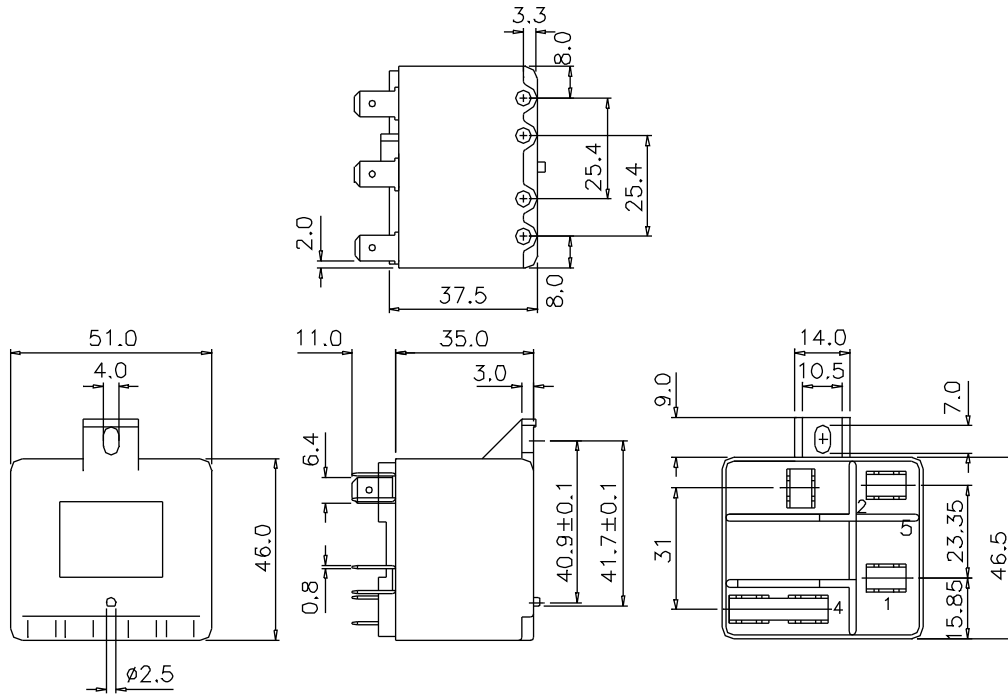

Wiring Diagram



NOTES

1. All parameters, unless otherwise specified, are measured at ambient temperature 23°C.
2. Custom-made services available with operational quantity. Please let us know your special requirements.
3. Specifications subject to change without prior notice.

Willow Technologies Limited
 Shawlands Court
 Newchapel Road
 Lingfield
 Surrey RH7 6BL
 England
 Tel: +44 (0) 1342-835234
 Fax: +44 (0) 1342-834306
 email: sales@willow.co.uk