

Data sheet : Relay-Base Series ZDV


Screw terminal socket designed for use with D Series miniature plug-in relays (model D2N & D4N). Mounting can be arranged either directly on panel or via DIN-46377 Omega rail. Equipped with top quality screw terminals incorporating large IP20 finger-protected rising clamps. The socket is suited to accept plug-in indication and/or protection modules. Screwdriver DIN release tab. An optional retaining clip is available.

SPECIFICATION

Rating :	10A 250VAC
Insulating resistance :	$\geq 1000 \text{ M}\Omega$
Dielectric strength :	$\geq 2 \text{ KV AC}$
Dimensions :	68x30x26 mm
Connections material :	nickel plated brass
Body plastic :	self extinguishing PPEm
UL94 Rating :	V1
Enclosure classif. (IEC 144)	IP20
Approvals:	UL , cUL

Available Types :

ZDV2 (2 pole)

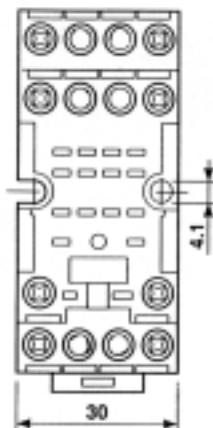

ZDV4 (4 pole)

