

Data sheet : **Relay-Base model ZVO / ZVU**


Screw terminal sockets designed for use with 8/11-pin plug-in relays (model C4-2 & C4-3). Mounting can be arranged either directly on panel or via DIN-46377 Omega rail. Screw terminals with jaw-type rising clamps. Reduced lateral dimensions allowing high density on DIN-rail. Both screws and terminals are touch-proof / finger protected to IP20. Suited to accept plug-in protection and indication modules.

**SPECIFICATION**

Rating :	10A 250VAC
Insulating resistance :	$\geq 1000 \text{ M}\Omega$
Dielectric strength :	$\geq 2 \text{ KV}$
Dimensions :	70x16x27 mm
Connections material :	nickel plated brass
Body plastic :	self extinguishing PPEm
UL94 Rating :	V1
Enclosure classif. (IEC 144)	IP20
Approvals:	UL, IMQ

**Available Types :**

**ZVO (8-pin)**

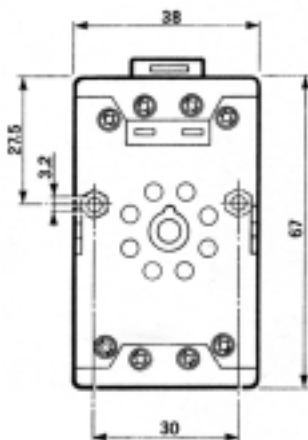

**ZVU (11-pin)**

