


A seismic streamer heading
sensor for only \$799.

Yes, **\$799.**
(No, that's not a typo.)

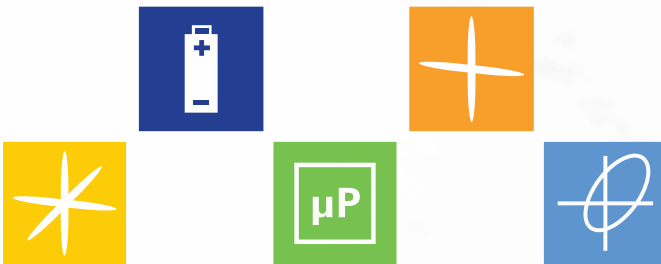


Introducing the new SeaTRAX heading sensor.

We heard you. Those fluxgate heading sensors are awfully expensive, often making their widespread use unfeasible. But PNI Sensor's new SeaTRAX is a new magneto-inductive heading sensor that meets your stringent streamer specs — at an amazing price of **\$799** (even less if you buy in large quantities).

Unlike heading sensors costing thousands more, SeaTRAX is backed by PNI Sensor Corporation's decades of heading sensor design and manufacturing experience — making it a dramatically more cost-effective solution from a **proven source** for on-time delivery to meet your seismic streamer production needs.

Seismic streamer heading module prices are heading down.

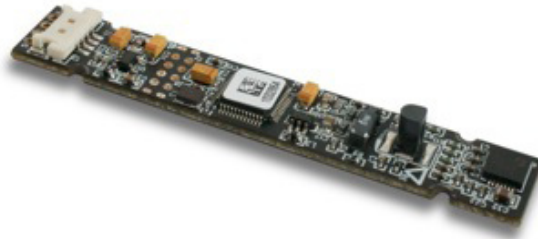

For seismic streamer makers who find current heading sensor offerings too expensive, PNI Sensor's SeaTRAX is a new magneto-inductive heading sensor that provides reliable heading data at a practical cost.

Unlike heading sensors costing thousands more, PNI Sensor's SeaTRAX meets seismic streamer specifications and is designed and made by PNI Sensor Corporation, who has years of heading sensor manufacturing experience. PNI is a proven source for on-time delivery to meet your production needs.

Features:

- High Accuracy
- Multiple field calibration options
- Low power consumption
- RS232 interface
- Long, slim form factor

Specifications¹

Performance Specifications	Heading	$\leq 65^\circ$ of pitch ²	$< 0.3^\circ$ rms	
		Resolution	0.1°	
		Repeatability	0.05 rms	
	Tilt	Range	$\pm 90^\circ$ pitch, $\pm 180^\circ$ roll	
		Accuracy w/ $\leq 65^\circ$ of pitch	0.2° rms	
		Resolution	0.01°	
		Repeatability	0.05 $^\circ$ rms	
	Maximum Dip Angle ³	85°		
I/O Characteristics	Communication Interface	RS232		
Mechanical Characteristics	Dimensions (l x w x h)	- with Z-Axis Shield - without Z-Axis Shield	70 x 11.8 x 10.3 mm 70 x 11.8 x 9.8 mm	
	Weight	4.3 gm		
Power Requirements	Supply Voltage	3.8- 9 VDC		
	Current Draw @ 8Hz sample rate	17 mA		
Temperature Range	Operation	-40°C to $+85^\circ\text{C}$		
	Storage	-40°C to $+85^\circ\text{C}$		

1. Product specifications are preliminary and subject to change
2. After using full-sphere calibration; see user manual for accuracy after using other calibrations
3. Performance at maximum dip angle will be degraded.

SeaTRAX
HEADING MODULE



3-AXIS



HARD AND SOFT IRON CORRECTION



INTEGRATED PROCESSOR



LOW POWER

PNI MAGNETO-INDUCTIVE ORIENTATION SENSORS can tell you if something is up or down, sideways or facing east. They can tell you where in space your handheld is, or track movement across a screen or down a ravine. They're reliably accurate underwater, in space, in a car, and at extreme temperatures — all with pin-point accuracy, and using far less power than other technologies.

PNI uses the existing power of the earth's magnetic field to measure position, orientation and heading, applying its patented Magneto-Inductive technology in each of its sensors and modules.

Many of today's leading companies are using PNI technology in their marquee products and across a wide spectrum of applications, including compassing, surveying equipment, sonar, robotics, vehicles and oceanography equipment.

For ordering information and most current specifications, please visit www.pnicorp.com

PNI Sensor Corporation 133 Aviation Blvd, Suite 101, Santa Rosa, CA 95403-1084 USA
Phone: 707-566-2260 Fax: 707-566-2261

